

800-SERIES - HIGH SPEED DOME IP CAMERA

CM-M806




DESCRIPTION

OpenEye's CM-M806 is an IP PTZ camera capable of resolutions up to 1080p. The CM-M806 IP camera can transmit video at H.264 and MJPEG codecs. With Digital Wide Dynamic Range, the CM-M806 is an excellent choice for installations with difficult lighting conditions.

HIGHLIGHTS

- » 1080p (2MP) maximum resolution
- » 4.7 ~ 84.6mm (18x zoom) (55.2° ~ 5.2° FoV) focal length
- » IP66 (Outdoor) IP rating
- » True Day / Night (IR cut filter)
- » Digital Wide Dynamic Range
- » H.264 / MJPEG video compression
- » Sony 1/2.8" CMOS image sensor
- » ONVIF Profile S compliant

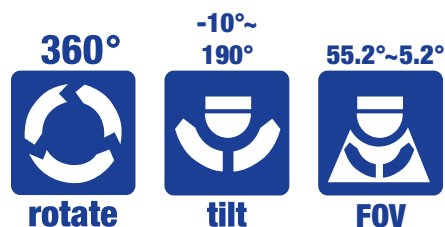

800-SERIES - HIGH SPEED DOME IP CAMERA

CAMERA SPECIFICATIONS

	CM-M806 (Rev C N4)
Maximum Resolution	1080p (2MP)
Image Sensor	Sony 1/2.8" CMOS
Video Compression	H.264 / MJPEG
Frame Rate	30 IPS @ 1080P [1920 x 1080 / 2MP] 30 IPS @ 1280 x 1024 / 1.3MP 30 IPS @ 720P [1280 x 720 / 1MP] 30 IPS @ 1024 x 768 30 IPS @ 800 x 600 30 IPS @ 720 x 480 30 IPS @ 640 x 480 30 IPS @ 352 x 240
ONVIF	Profile S
Streaming	Up to 4 simultaneous streams
Browser Support	Internet Explorer (ActiveX) Chrome, Firefox, Safari (Quicktime)
Day / Night	True Day/Night (IR Cut Filter)
Wide Dynamic Range	Digital WDR
Lens	4.7~84.6mm (18x zoom)
Horizontal Field of View	55.2°~5.2°
Iris	F1.6~F2.8
Minimum Illumination @ 50IRE	0.1 (Color) & 0.03 (B/W) lux @ F1.6
Minimum Illumination @ 30IRE	0.05 (Color) & 0.01 (B/W) lux @ F1.6
White Balance	Auto, Manual, ATW, Presets
Auto White Balance Range	Auto: 2700K~7500K ATW: 2500K~10000K
Backlight Compression	Yes
Auto Gain Control	Yes

PHYSICAL

	CM-M806 (Rev C N4)
Audio In / Out	1 / 1
Alarm In / Out	2 / 4
microSD Card Slot	microSD / microSDHC 32GB max
Weight	5.11lb (2.32kg)
Dimensions	Ø 7.5" (191.97mm) H: 11.1" (282.11mm)
Housing / Dome Cover	White/Clear
Tilt / Rotation	-10°~190° / 360° Endless

PTZ DETAIL

Control Type	PTZ control via network only
Zoom Factor	18x
Presets	256
Preset Accuracy	±0.225°
Preset Speed	5°~400°/second
Pattern	8
Tour (Group)	8
Auto Scan	4
Privacy Mask	16
Home Function	Preset, Pattern, Tour, Autoscan
Auto Flip	Image / Mechanical
Focus Mode	Auto / Manual

ENVIRONMENTAL

IP Rating	N/A (Indoor)
Operating Temperature	32°F~122°F (0°C~50°C)
Heater	No
Heater Operational Threshold	N/A (No Heater)
Active / Passive Cooling	Active (Fan)

POWER

Power Consumption	24W Max
Rated Amperage	0.97A
Input Voltage	24vAC / PoE+ (802.3at)
PoE Class	4

800-SERIES - HIGH SPEED DOME IP CAMERA

INDOOR PTZ MODELS

CM-M806 High Speed Dome IP Camera

AVAILABLE ACCESSORIES

OE-CAMFMK M-Body Flush Mount Kit

OE-CA510PA25 500/800 1/4" Threaded Pipe Adapter

OE-CA510PA50 500/800 1/2" Threaded Pipe Adapter

OE-CA510PML 500/800 Pole Bracket w/Straps

OE-CA510P25 800 10" Pole and Ceiling Plate

OE-CA510P50 800 20" Pole and Ceiling Plate

OE-CA510C 500/800 Corner Bracket

OE-CA510W 500/800 7.25" Wall Mount Arm

OE-CA510WL 500/800 13.5" Wall Mount Arm

OE-CASWPOE-24 24 Port PoE Switch

OE-CASWPOE-8 8 Port PoE Switch

CA-501J PTZ3 Axis Joystick Controller

SYSTEM IMAGES

